




EHN-A, EHN-P

FLASHING

APPLICATION

Universal flashing for high profiled roof coverings









Maximum height of roof covering profile: 90mm (EHV-P), 120mm (EHV-A)

Installation in roof with pitches: 15-90°




Available with lead apron (EHN-P) and aluminium-plastic (EHN-A)

Window installation depth: V (0)



ELEMENTS OF FLASHING STRUCTURE

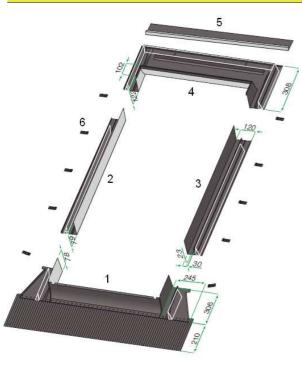

COMPATIBILITY WITH WINDOWS

Flashing	Window type								Collector type						
type	FT_	FP_	PT_	PP_	FD_	FY_	FE_	FG_	BD_	BV_	BX_	FS_	FW_	SKW	SKC
EHN-A								\times	\times	\supset	\times	\times	\supset		><
EHN-P								X	\boxtimes	\boxtimes	X	\times			$\supset \subset$

SIZE LIMITS

Window size		Window width [cm]									
		46	48	55	66	78	94	114	134		
	60					33	34	35	36		
Window height [cm]	78	46	47	01	22	23	24	25	26		
	98	48	49	02	03	05	15	20	12		
	118			16	04	06	08	10	18		
	140				14	07	09	11	17		
	160					13	80	50	\sim		
	180	$>\!<$			\sim	40	41		$\overline{}$		
	186	$>\!<$			$\geq <$	CA	DA		\sim		
	206	$>\!<$				CB	DB		\sim		
	235	> <				CC	DC	$\overline{}$	$\overline{}$		
	255	$\overline{}$		$\overline{}$		CD	DD				

- Available sizes

- Not available in the offer due to the lack of the window in this size

COMBINATIONS

Horizontal combinations are realized through appropriate modules: KHN-1, KHN-2 and KHN-3





Vertical combinations are realized through KDN module



Block combinations are realized through appropriate modules KHN-1, KHN-2, KHN-3 and KHN-4, KHN-5, KHN-6





MATERIAL

Aluminium sheet metal: AW-1050A

Lacquer: modified polyester in RAL 7022

Sheet metal thickness: 0.6 mm

and attached sealing wedges

5 - Water draining gutter

Lead apron: made of lead sheet metal (Pb99,94Cu) with a thickness of 0.6mm, grooved, shortening coefficient 0,8

1 – Lower flashing element with a flexible lead or AL/PVC tape apron

2 – Side flashing gutter – left with attached sealing wedge
3 – Side flashing gutter – right with attached sealing wedge
4 – Upper flashing element with a tile supporting section and wedge

6 - Hooks for attaching flashing elements to the battens.

Aluminium-plastic apron: made of aluminium tape (EN-AW-1200/AI 99,0) combined with PVC film, pleated, shortening coefficient 0,55

OPTIONS



Flashing sections in RAL colours

Copper sections flashing

Titanium-zinc flashing sections:

- Rhenizink sheet metal in version: "bright-rolled", "patinaPRO greyblue" and "patinaPRO graphite"
- VMZINC sheet metal from Pigmento series (green, red, blue) and Anthra-Zinc and Quartz-Zinc