

EZV-A, EZV-P

FLASHING

APPLICATION

Universal flashing for profiled roof coverings



Maximum height of roof covering profile: 45mm

Installation in roof with pitches: 15-90°




Available with lead apron (EZV-P) and aluminium-plastic (EZV-A)

Window installation depth: V (0)



ELEMENTS OF FLASHING STRUCTURE

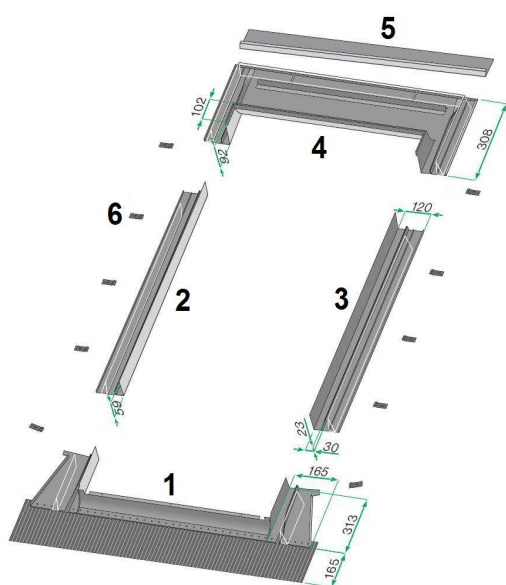

- 1 – Lower flashing element with a flexible lead or AL/PVC tape apron and attached sealing wedges
- 2 – Side flashing gutter – left with attached sealing wedge
- 3 – Side flashing gutter – right with attached sealing wedge
- 4 – Upper flashing element with a tile supporting section and wedge
- 5 – Water draining gutter
- 6 – Hooks for attaching flashing elements to the battens.

COMPATIBILITY WITH WINDOWS

Flashing type	Window type												Collector type		
	FT	FP	PT	PP	FD	FY	FE	FG	BD	BV	BX	FS	FW	SKW	SKC
EZV-A	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█
EZV-P	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█


SIZE LIMITS

Window size	Window width [cm]							
	46	48	55	66	78	94	114	134
60	█	█	█	█	█	█	█	█
78	█	█	█	█	█	█	█	█
98	█	█	█	█	█	█	█	█
118	█	█	█	█	█	█	█	█
140	█	█	█	█	█	█	█	█
160	█	█	█	█	█	█	█	█
180	█	█	█	█	█	█	█	█
186	█	█	█	█	█	█	█	█
206	█	█	█	█	█	█	█	█
235	█	█	█	█	█	█	█	█
255	█	█	█	█	█	█	█	█

█ - Available sizes
 █ - Not available in the offer due to the lack of the window in this size

COMBINATIONS


Horizontal combinations are realized through appropriate modules: KZV-1, KZV-2 and KZV-3



Vertical combinations are realized through KDV module



Block combinations are realized through appropriate modules KZV-1, KZV-2, KZV-3 and KXV-4, KXV-5, KXV-6

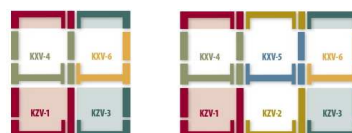

OPTIONS



Flashing sections in RAL colours
 Copper sections flashing

Titanium-zinc flashing sections:
 - Rhenizink sheet metal in version: "bright-rolled", "patina^{PRO} grey-blue" and "patina^{PRO} graphite"
 - VMZINC sheet metal from Pigmento series (green, red, blue) and Anthra-Zinc and Quartz-Zinc

MATERIAL

Aluminium sheet metal: AW-1050A

Lacquer: modified polyester in RAL 7022

Sheet metal thickness: 0.6 mm

Lead apron: made of lead sheet metal (Pb99,94Cu) with a thickness of 0.6mm, grooved, shortening coefficient 0.8

Aluminium-plastic apron: made of aluminium tape (EN-AW-1200/Al 99,0) combined with PVC film, pleated, shortening coefficient 0.55